

受 控

SPECIFICATION


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at 25°C)

| | | |
|---------------------------|---|-------------------------|
| 2.1 Resonant Frequency | : | 1.3 ± 0.5 KHz |
| 2.2 Resonant Resistace | : | 500 Ω max |
| 2.3 Capacitance | : | 60000 pF ± 30% at 100Hz |
| 2.4 Input Voltage | : | 30 Vp-p max |
| 2.5 Operating Temperature | : | -20~+50°C |
| 2.6 Storage Temperature | : | -20~+70°C |
| 3. DIMENSION | : | as per figure |

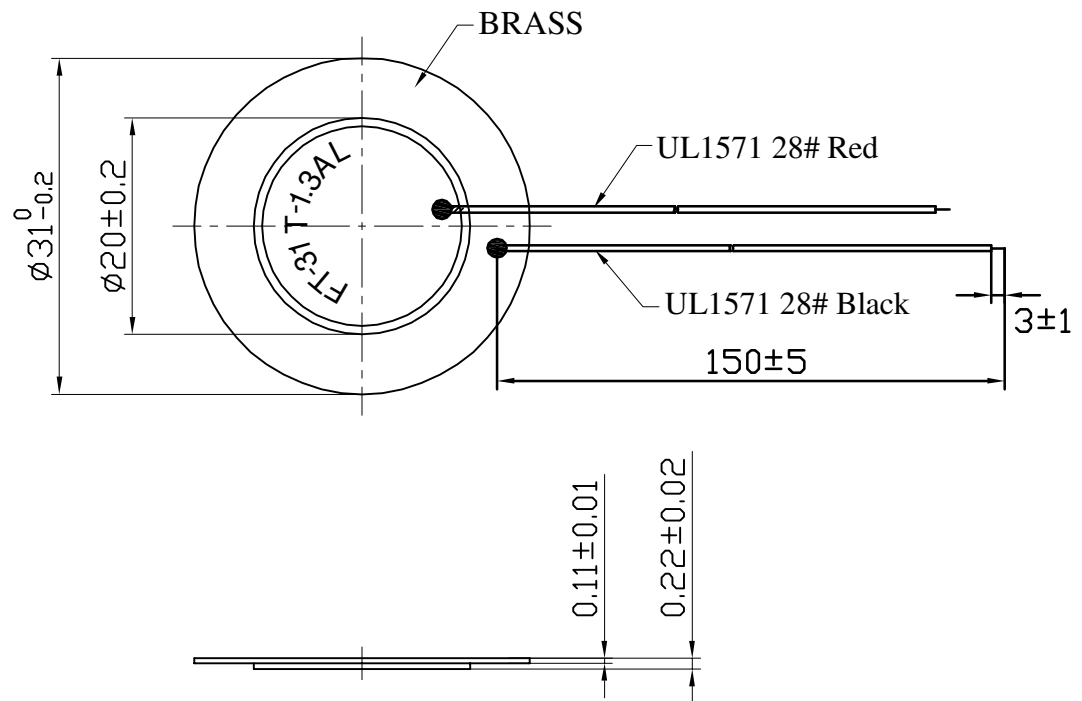


TOLERANCES UNLESS NOTED OTHERWISE

.X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



| | |
|-----------------|----------|
| DRAWN | 汪逸 |
| DESIGN | |
| CHECKED | |
| APPROVED | 徐锦生 |
| DATE | 10.12.06 |
| CONTRACT NO. | |
| AGENCY APPROVAL | |

KEPO MODEL NO.

FT-31T-1.3AL 150-1924

DWG NO.

OEM1924

KEPO CO.,LTD.

CUSTOMER

QUARTZ-1

CUSTOMER NO.

VER

1.2

SCALE

UNIT

mm

SHEET

TEL:(+86)574-88370330

FAX:(+86)574-88370329